

ACQUA C 03 WH 4000K (with driver)

Recessed LED-based luminaire

Description

Built-in luminaire provides straight diffused light. Lighting fixture case is made of aluminum with powder paint. Optical part is covered with milk tempered glass.

Installation



Installed recessed in plasterboard ceilings.

Design

Powder-painted aluminum housing. The optical part is covered with an opal tempered glass. No driver.

Optical part

Opal diffuser

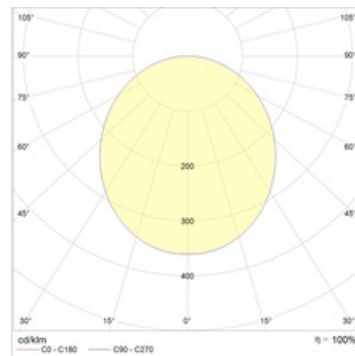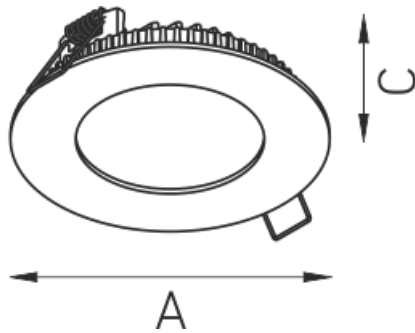

Dimensional characteristics

A	Diameter	83 mm
C	Height	25 mm
D	Diameter (mounting)	70 mm
	Weight	0.2 kg

Technical features

1	Article no.	1596000160
2	Light source	LED
3	Luminous flux	250 lm
4	Power compatibility	4 W
5	Energy efficiency	63 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,92
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP54/IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	8 A
23	Inrush current impulse time	300 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-