

ALO (2) 236 HF

Luminaires for lathed ceilings with an opal diffuser

Description

Luminaire for office and administration facilities. Installed in Italian and German style lathed ceilings. Can be used with one or two T8 lamps. Suitable for both functional and designer lighting.

Installation

Installed recessed in Italian and German style lathed ceilings.

Design

White powder-painted weld sheet steel housing. Control gear is installed inside the housing.


Optical part

Extruded opal polymeric diffuser.


Product picture:



Light distribution:

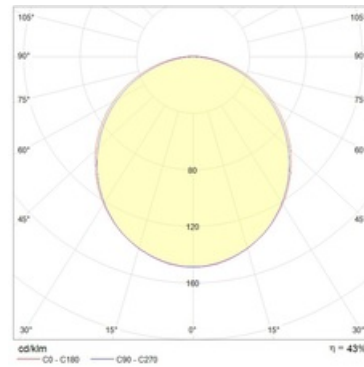

Dimensions:



A	Length	1275 mm
B	Width	120 mm
C	Height	65 mm
D	Length (mounting)	1252 mm
	Weight	4.1 kg

Technical features

1	Article no.	1005000230
2	Light source	FL
3	Socle	G13
4	Number of Lamps	2
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months