

## ARS/S 236 HF ES1

### Luminaires with a specular spill shield

#### Description

Surface-mounted luminaire with a specular shield louver. For mounting on the ceiling surface. White or metallic housing color. Fluorescent lamps of different type and power are used as the light source.

#### Installation

Mounted on the ceiling surface. Requires ordering X4 Mounting Kit (order code 2995000040).

#### Design

White powder-painted weld sheet steel housing. Control gear is installed inside the housing.


#### Optical part

Mirror-finish aluminum spill shield secured inside the housing with hidden springs. The luminaire can be supplied with a matte aluminum spill shield.


#### Product picture:



#### Light distribution:

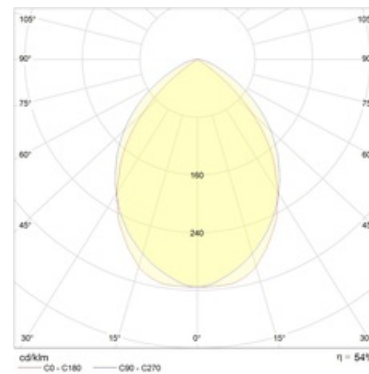

#### Dimensions:

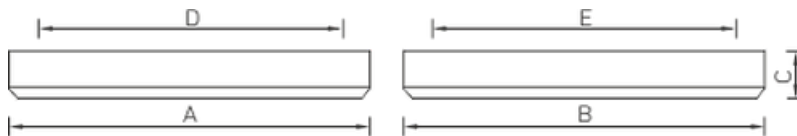

A	Length	1225 mm
B	Width	310 mm
C	Height	80 mm
D	Length (mounting)	1050 mm
E	Width (mounting)	224 mm
	Weight	4.7 kg

## Technical features

1	Article no.	1041000190
2	Light source	FL
3	Socle	G13
4	Number of Lamps	2
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	Yes
22	Beam angle	-
23	Warranty	36 months