

ARS/S 418 /600/ HF ES1

Luminaires with a specular spill shield

Description

Surface-mounted luminaire with a specular shield louver. For mounting on the ceiling surface. White or metallic housing color. Fluorescent lamps of different type and power are used as the light source.

Installation

Mounted on the ceiling surface. Requires ordering X4 Mounting Kit (order code 2995000040).

Design

White powder-painted weld sheet steel housing. Control gear is installed inside the housing.


Optical part

Mirror-finish aluminum spill shield secured inside the housing with hidden springs. The luminaire can be supplied with a matte aluminum spill shield.


Product picture:



Light distribution:

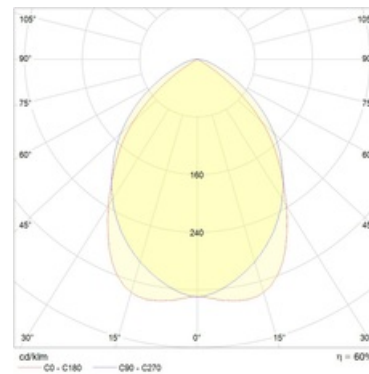

Dimensions:

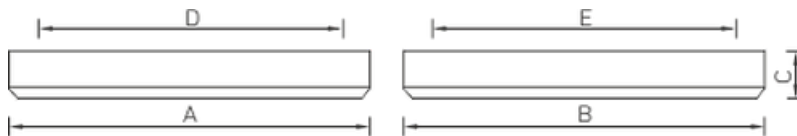

A	Length	625 mm
B	Width	610 mm
C	Height	80 mm
D	Length (mounting)	420 mm
E	Width (mounting)	420 mm
	Weight	4.5 kg

Technical features

1	Article no.	1041000360
2	Light source	FL
3	Socle	G13
4	Number of Lamps	4
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	Yes
22	Beam angle	-
23	Warranty	36 months