

## ARS/S 436 /600/ HF

### Luminaires with a specular spill shield

#### Description

Surface-mounted luminaire with a specular shield louver. For mounting on the ceiling surface. White or metallic housing color. Fluorescent lamps of different type and power are used as the light source.

#### Installation

Mounted on the ceiling surface. Requires ordering X4 Mounting Kit (order code 2995000040).

#### Design

White powder-painted weld sheet steel housing. Control gear is installed inside the housing.


#### Optical part

Mirror-finish aluminum spill shield secured inside the housing with hidden springs. The luminaire can be supplied with a matte aluminum spill shield.


#### Product picture:



#### Light distribution:

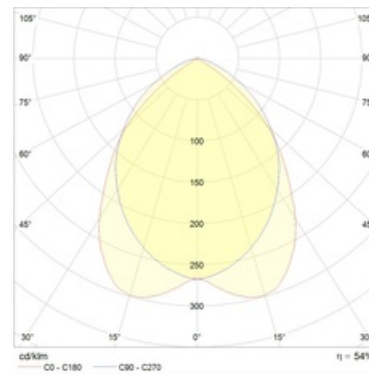

#### Dimensions:

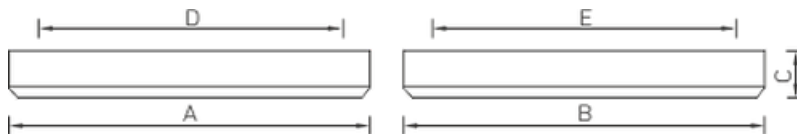

<b>A</b>	<b>Length</b>	<b>1228 mm</b>
<b>B</b>	<b>Width</b>	<b>610 mm</b>
<b>C</b>	<b>Height</b>	<b>80 mm</b>
<b>D</b>	<b>Length (mounting)</b>	<b>1048 mm</b>
<b>E</b>	<b>Width (mounting)</b>	<b>508 mm</b>
	<b>Weight</b>	<b>6.9 kg</b>

## Technical features

1	Article no.	1041000490
2	Light source	FL
3	Socle	G13
4	Number of Lamps	4
5	Power compatibility	144 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months