

BAT 136 HF /E/

BAT open luminaires

Description


Simple, reliable, and highly universal BAT luminaire. Can be mounted directly on the wall/ceiling surface, installed on brackets, or suspended on hinges.

Installation

Mounted on the ceiling or wall surface. Requires X3 Mounting Kit (order code 2995000030).

Design

White powder-painted weld sheet steel housing. Polymeric end caps. Control gear is installed inside the housing. Diffusers are ordered separately.

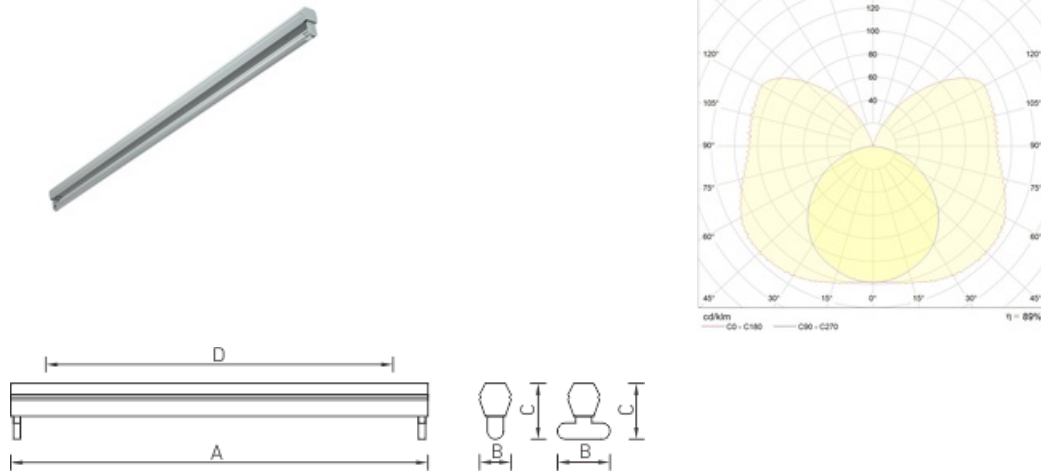

Dimensional characteristics

| | | |
|---|-------------------|---------|
| A | Length | 1222 mm |
| B | Width | 54 mm |
| C | Height | 84 mm |
| D | Length (mounting) | 1039 mm |
| | Weight | 1.2 kg |

Technical features

| | | |
|----|-------------------------------------|-------------|
| 1 | Article no. | 1997009640 |
| 2 | Light source | FL |
| 3 | Socle | G13 |
| 4 | Number of Lamps | 1 |
| 5 | Power compatibility | 36 W |
| 6 | Ballast | ECG |
| 7 | Dimming | - |
| 8 | Power factor (cosFI) | > 0,96 |
| 9 | Alternating/direct current (AC/DC) | No |
| 10 | Rated voltage | 230 V |
| 11 | Electrical shock protection | I |
| 12 | Electromagnetic compatibility (EMC) | Yes |
| 13 | Climate application | Clm App4 |
| 14 | Ambient temperature | +5 to +35 C |
| 15 | Housing color | White |
| 16 | Fire protection class | - |
| 17 | Flickering | <5% |
| 18 | Ingress protection (IP) | IP20 |
| 19 | Mechanical shock protection | IK02/0,2 J |
| 20 | Energy efficiency class | A |
| 21 | Emergency power supply unit | No |
| 22 | Beam angle | - |
| 23 | Warranty | 36 months |