

## BOX 2023-5 LED S

### BOX series light signs

#### Description

Affordable series of light signs in a steel housing. The light is also distributed to the lower part of the housing, which makes it possible to use the luminaire for emergency exit way lighting.

#### Installation

Mounted on a wall.

#### Design

White powder-painted sheet steel housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.


#### Optical part

PVC diffuser. The light is also distributed to the lower part of the housing, which makes it possible to use the luminaire for evacuation route lighting. Pictograms are supplied separately. Recognition distance 37 m.


#### Product picture:



#### Light distribution:

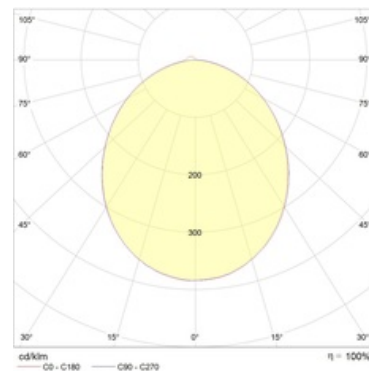

#### Dimensions:

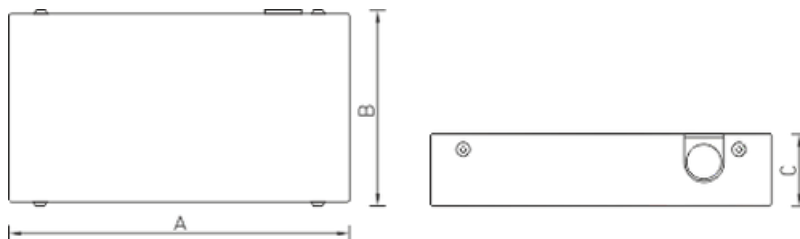

A	Length	392 mm
B	Width	61 mm
C	Height	191 mm
D	Length (mounting)	310 mm
E	Width (mounting)	107 mm
Weight		1.7 kg

## Technical features

1	Article no.	1392000020
2	Light source	LED
3	Power compatibility	5 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	D...B
7	Color rendering index (CRI)	-
8	Flickering	-
9	Luminous flux	150 lm
10	Battery Ni-Cd	RB 6,0 V 1,5 A*h Ni-Cd
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App4
15	Housing color	White
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	No
21	Autonomy in emergency mode	3
22	Emerg. work type	maintained
23	Average brightness	150
24	Identification distance	33
25	Warranty	60 months
26	Light flux in emergency mode	150 lm