

CD 218 HF new

IP65 rated luminaire with a compact fluorescent lamp

Description

Luminaire with a high IP rating designed for outdoor facade lighting and indoor lighting in areas with high dust and moisture content. Mounted directly on the ceiling surface indoors or under a canopy. The optical part comprises a hemispherical PMMA diffuser. Can be supplied with a built-in motion detector.

Installation



Mounted on ceiling/wall surface indoors or under canopy.

Design

White polycarbonate housing.

Optical part

PMMA diffuser.

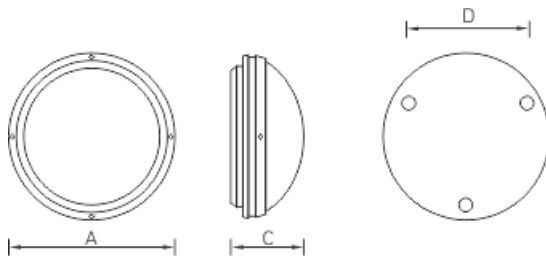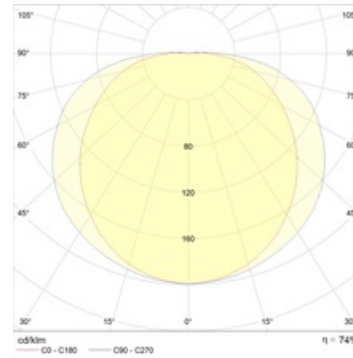

Dimensional characteristics

A	Diameter	390 mm
C	Height	150 mm
D	Diameter (mounting)	255 mm
	Weight	2.4 kg

Technical features

1	Article no.	1133000250
2	Light source	CFL
3	Socle	2G11
4	Number of Lamps	2
5	Power compatibility	36 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	II
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App2
14	Ambient temperature	-20 to +40 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months