

CUPOLA HBL LED 15 4000K /E/

HB series luminaires



Description

Pendant luminaire for indoor sales areas. The LED module with a high CRI (Ra>90) provides quality light that makes it possible to render vivid color shades of the goods and the interior.

Installation


Suspended on the power cord.

Design

Anodized aluminum housing, built-in LED module.

Optical part

Anodized aluminum reflector, LED module. LED type: SMD.

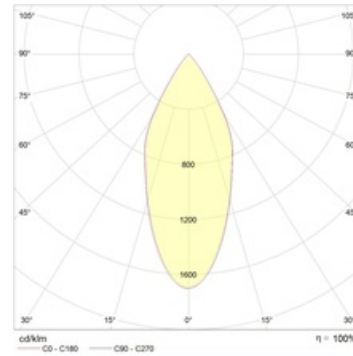

Dimensional characteristics

A	Diameter	255 mm
C	Height	280 mm
	Weight	0.7 kg

Technical features

1	Article no.	1997015340
2	Light source	LED
3	Luminous flux	1000 lm
4	Power compatibility	15 W
5	Energy efficiency	67 lm/W
6	Color rendering index (CRI)	>90
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,90
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	Metallic
17	Fire protection class	-
18	Flickering	<20%
19	Ingress protection (IP)	IP23
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-