

DAPHNE K 550 WH LED 4000K

Pendant LED luminaire on the bar



Description

Pendant lamp on the bar, creating a diffuse lighting. Diffuser made of hand blown three-layered opal glass. Ceiling cup in painted metal. Metal parts can be painted in different colors. Standard color WH – white, also available colors: CH – chrome, BR – brass, SL – metallic gray (RAL 9006).

Installation



Pendant lamp on the bar

Design

Hand-blown three-ply opal glass diffuser. Ceiling cup and suspender is metal.

Optical part

Opal diffuser

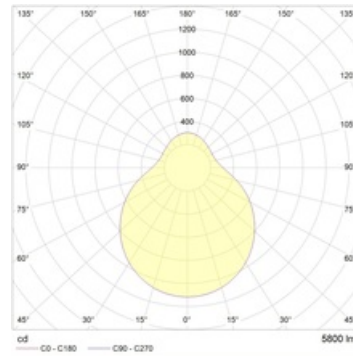

Dimensional characteristics

A	Diameter	550 mm
C	Height	200 mm
	Weight	8.2 kg

Technical features

1	Article no.	1450000080
2	Light source	LED
3	Luminous flux	5800 lm
4	Power compatibility	44 W
5	Energy efficiency	132 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clm App4
15	Ambient temperature	0 to +40 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-