

DAPHNE S 550 WH 375

Suspended glass lamp luminaire

Description

Ceiling surface mounted luminaire creates diffused illumination. Suitable for wall mounting. Handmade diffuser made of blown three-layered opal glass. Mounting plate made of metal painted mat white.

Installation



On a ceiling.

Design

Hand-blown three-ply opal glass diffuser. Ceiling cup is metal.

Optical part

Opal diffuser

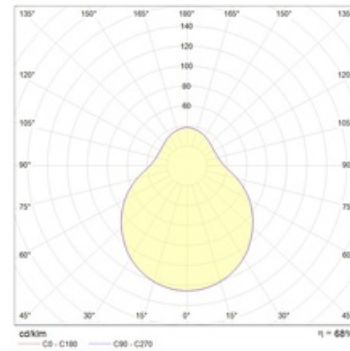

Dimensional characteristics

| | | |
|---|-------------------|--------|
| A | Diameter | 550 mm |
| C | Height | 200 mm |
| D | Length (mounting) | 430 mm |
| | Weight | 6.1 kg |

Technical features

| | | |
|----|-------------------------------------|-------------|
| 1 | Article no. | 1368000140 |
| 2 | Light source | IL |
| 3 | Luminous flux | 940 lm |
| 4 | Power compatibility | 225 W |
| 5 | Energy efficiency | 9 lm/W |
| 6 | Color rendering index (CRI) | - |
| 7 | Color temperature | - |
| 8 | Power factor (cosFI) | > 0,96 |
| 9 | Alternating/direct current (AC/DC) | No |
| 10 | Dimming | - |
| 11 | Rated voltage | 230 V |
| 12 | Electrical shock protection | I |
| 13 | Electromagnetic compatibility (EMC) | Yes |
| 14 | Climate application | CIm App4 |
| 15 | Ambient temperature | +5 to +35 C |
| 16 | Housing color | White |
| 17 | Fire protection class | III |
| 18 | Flickering | <5% |
| 19 | Ingress protection (IP) | IP20 |
| 20 | Mechanical shock protection | IK02/0,2 J |
| 21 | Energy efficiency class | E |
| 22 | Inrush current | - |
| 23 | Inrush current impulse time | 0 µs |
| 24 | Emergency power supply unit | No |
| 25 | Beam angle | - |
| 26 | Warranty | 36 months |
| 27 | Autonomy in emergency mode | - |
| 28 | Light flux in emergency mode | - |