

DISCO 25 3000K (w/o driver)

Recessed LED-based luminaire



Description

Recessed down light. Housing and decorative frame made of matte white painted aluminum. Optical part covered by polymeric glass. Drivers are delivered separately.

Installation


Installed in ceilings.

Design

Matte white painted aluminum housing and decorative frame. The optical part is covered with a polymeric glass. No driver. Driver selection information can be found in a file called "Choosing drivers for LED luminaires.pdf". The driver list is on the Accessories tab.

Optical part

Reflector.

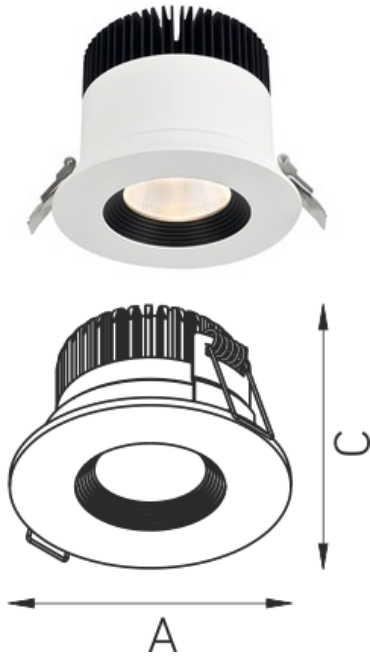

Dimensional characteristics

A	Diameter	150 mm
C	Height	120 mm
D	Diameter (mounting)	125 mm
	Weight	1.1 kg

Technical features

1	Article no.	1555000040
2	Light source	LED
3	Luminous flux	1720 lm
4	Power compatibility	25 W
5	Energy efficiency	69 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	3000 K
8	Power factor (cosFI)	> 0,95
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	35 V
12	Electrical shock protection	III
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	-
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	Белый