

## DISCUS S 30 3000K /E/

Ceiling mounted LED-based luminaire

### Description

Ceiling surface luminaire creates straight diffused illumination. Opal diffuser made with blown PMMA. Luminaire's housing made of polymeric material painted matte white.

### Installation



Suspended to a ceiling.

### Design

Opal PMMA diffuser. Matte white painted polymeric housing.

### Optical part

Opal diffuser.

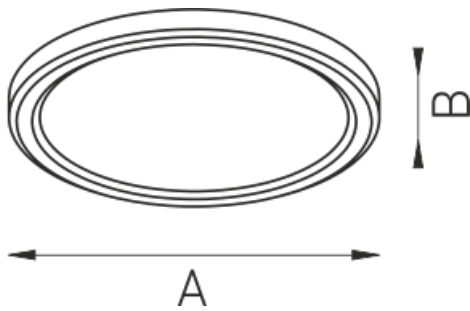

## Dimensional characteristics

A	Diameter	475 mm
C	Height	50 mm
D	Diameter (mounting)	400 mm
	Weight	2.2 kg

## Technical features

1	Article no.	1997023470
2	Light source	LED
3	Luminous flux	2500 lm
4	Power compatibility	34 W
5	Energy efficiency	74 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	3000 K
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Inrush current	15 A
23	Inrush current impulse time	300 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-