

DL TURN LED 28 W D70 4000K /E/

DL TURN LED directional luminaire

Description

Directional LED-based luminaire with rotary optical part that makes it possible to change the light direction after installation. The choice of reflector angles from narrow to medium allows using the luminaire both for accent lighting and as a bright luminaire for general lighting.

Installation





Installed recessed in Armstrong type suspended ceilings or plasterboard ceilings.

Design

White powder-painted die-cast aluminum body. The optical part can be tilted up to 60 degrees from the horizontal axis and up to 355 degrees from the vertical.

Optical part

Aluminum reflector. Clear tempered glass. LED type: COB.

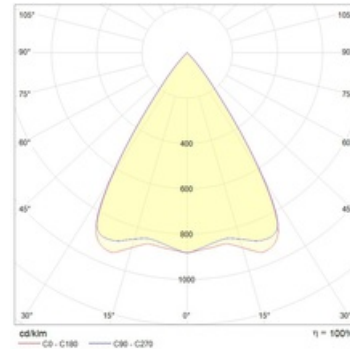

Dimensional characteristics

A	Diameter	162 mm
C	Height	138 mm
D	Diameter (mounting)	150 mm
	Weight	0.7 kg

Technical features

1	Article no.	1997015690
2	Light source	LED
3	Luminous flux	2500 lm
4	Power compatibility	28 W
5	Energy efficiency	89 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,97
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clim App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	-
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	5 A
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D70
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-