

DLA 150

Directional luminaires with metal halide lamps

Description

Surface-mounted directional MHL-based luminaire.

Installation

Mounted on a surface.

Design

White powder-painted metal housing.


Optical part

Specular anodized aluminum reflector, tempered silicate glass with anti-glare frosting.


Product picture:



Light distribution:

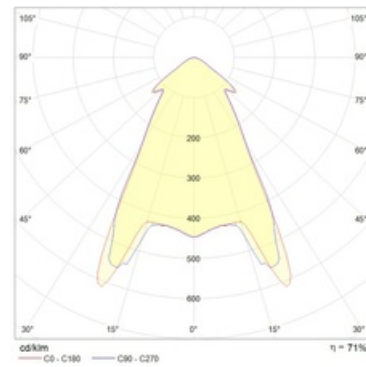

Dimensions:

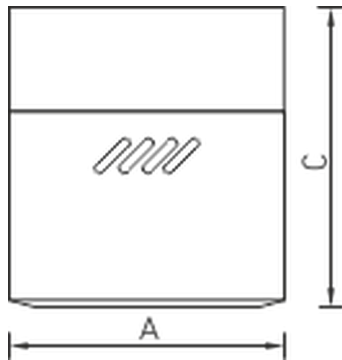

A	Diameter	193 mm
C	Height	210 mm
D	Diameter (mounting)	150 mm
	Weight	3.7 kg

Technical features

1	Article no.	1171000010
2	Light source	MHL
3	Socle	G12
4	Number of Lamps	1
5	Power compatibility	150 W
6	Ballast	EmCG
7	Dimming	-
8	Power factor (cosFI)	> 0,85
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<50%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months