

DLA 35

Directional luminaires with metal halide lamps

Description

Surface-mounted directional MHL-based luminaire.

Installation

Mounted on a surface.

Design

White powder-painted metal housing.


Optical part

Specular anodized aluminum reflector, tempered silicate glass with anti-glare frosting.


Product picture:



Light distribution:



Dimensions:

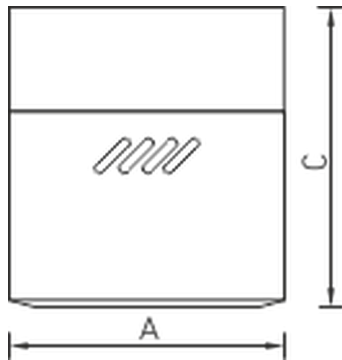

| | | |
|----------|---------------|---------------|
| A | Length | 195 mm |
| B | Width | 195 mm |
| C | Height | 210 mm |
| | Weight | 3 kg |

Technical features

| | | |
|----|-------------------------------------|-------------|
| 1 | Article no. | 1171000040 |
| 2 | Light source | MHL |
| 3 | Socle | G12 |
| 4 | Number of Lamps | 1 |
| 5 | Power compatibility | 35 W |
| 6 | Ballast | EmCG |
| 7 | Dimming | - |
| 8 | Power factor (cosFI) | > 0,85 |
| 9 | Alternating/direct current (AC/DC) | - |
| 10 | Rated voltage | 220 V |
| 11 | Electrical shock protection | I |
| 12 | Electromagnetic compatibility (EMC) | Yes |
| 13 | Climate application | CIm App4 |
| 14 | Ambient temperature | +5 to +35 C |
| 15 | Housing color | White |
| 16 | Fire protection class | - |
| 17 | Flickering | <40% |
| 18 | Ingress protection (IP) | IP20 |
| 19 | Mechanical shock protection | IK00 |
| 20 | Energy efficiency class | - |
| 21 | Emergency power supply unit | No |
| 22 | Beam angle | - |