

## DLO 218 HF

Directional luminaires with compact fluorescent lamps

### Description

Directional luminaire in a lightweight polycarbonate housing with an IP44 rated optical part.

### Installation


Installed recessed in Armstrong type suspended ceilings or plasterboard ceilings.

### Design

Polycarbonate housing. The control gear is mounted on a galvanized steel plate permanently attached to the luminaire housing.

### Optical part

Matte PMMA diffuser.

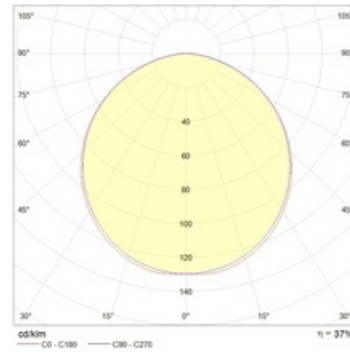

## Dimensional characteristics

A	Length	350 mm
B	Width	221 mm
C	Height	121 mm
D	Diameter (mounting)	200 mm
	Weight	0.8 kg

## Technical features

1	Article no.	1195000100
2	Light source	CFL
3	Socle	G24q-2
4	Number of Lamps	2
5	Power compatibility	36 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP44/IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months