

DOMINO LED PANEL/T (500) 80 D90 4000K /E/

Track-mounted LED-based luminaire



Description

Track-mounted luminaire to create a multi-functional system of general lighting in the trading floors of large and medium format retail. The system is distinguished by the flexibility of installation and maintenance, as well as the possibility of rearranging the modules depending on the exposure and combination with other types of instruments on the same track.

Installation

Mounted on a three-phase euro-DIN track

Design


Steel housing with installed isinside driver

Optical part

Lenses from light-stabilized PC. LED type: SMD.

Package

Luminaire assembly

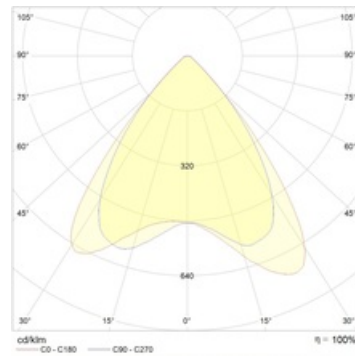

Dimensional characteristics

A	Length	504 mm
B	Width	193 mm
C	Height	40 mm
D	Length (mounting)	465 mm
	Weight	2.5 kg

Technical features

1	Article no.	1997030530
2	Light source	LED
3	Luminous flux	8800 lm
4	Power compatibility	80 W
5	Energy efficiency	110 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,97
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	-
18	Flickering	<1%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D90
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	White