

## DR. OPL 418 /595/ HF ES1 SET

Luminaire with an opal drop diffuser



### Description

Recessed luminaire. Ideal for rooms where soft diffused light is required. Features a diffuser protruding from the ceiling.

### Installation



Installed recessed in Armstrong type suspended ceilings or plasterboard ceilings using mounting clips. Order code for clips: 2905000110 (4 pcs per luminaire).

### Design

White powder-painted all-metal weld housing. Control gear is installed inside the housing.

### Optical part

Blow-molded opal PMMA diffuser secured in the housing with hidden plastic latches. The diffuser (included) and the housing are packed separately.

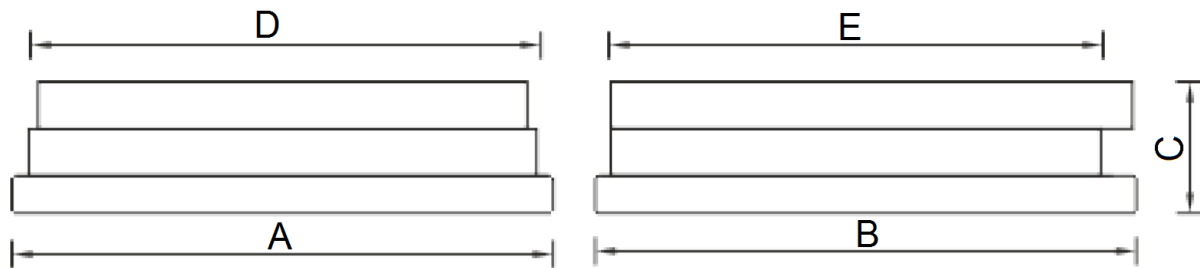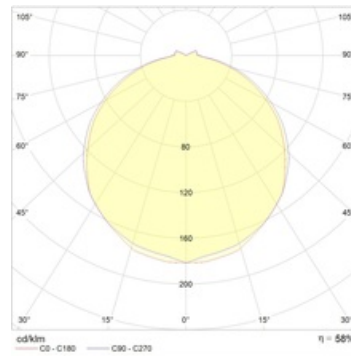

### Dimensional characteristics

A	Length	605 mm
B	Width	605 mm
C	Height	110 mm
D	Length (mounting)	575 mm
E	Width (mounting)	575 mm
	Weight	4.9 kg

### Technical features

1	Article no.	1025000120
2	Light source	FL
3	Socle	G13
4	Number of Lamps	4
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP43/IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	Yes
22	Beam angle	-
23	Warranty	36 months