

Granda NBT 18 F226 HF black

Wall-mounted luminaires

Description

Luminaire with a high degree of protection. Die-cast aluminum housing. Impact-resistant polycarbonate diffuser. Suitable for both functional and decorative uses.

Installation


Mounted on the ceiling or wall surface.

Design

Powder-painted die-cast aluminum housing, made of die-cast aluminum. The control gear is mounted on a metal plate inside the housing. Stable CFL operation at ambient temperatures down to $-20\text{ }^{\circ}\text{C}$.

Optical part

Opal polycarbonate diffuser.

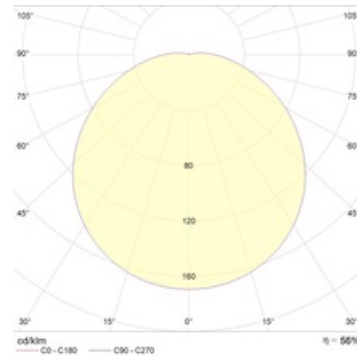

Dimensional characteristics

A	Length	359 mm
C	Height	131 mm
	Weight	4.2 kg

Technical features

1	Article no.	1430000170
2	Light source	CFL
3	Socle	G24d-3
4	Number of Lamps	2
5	Power compatibility	52 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	-
10	Rated voltage	220 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Black
16	Fire protection class	-
17	Flickering	<25%
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK00
20	Energy efficiency class	-
21	Emergency power supply unit	No
22	Beam angle	-