

# Granda NBT 18 F226 HF ES1 silver

Wall-mounted luminaires



## Description

Luminaire with a high degree of protection. Die-cast aluminum housing. Impact-resistant polycarbonate diffuser. Suitable for both functional and decorative uses.

## Installation


Mounted on the ceiling or wall surface.

## Design

Powder-painted die-cast aluminum housing, made of die-cast aluminum. The control gear is mounted on a metal plate inside the housing. Stable CFL operation at ambient temperatures down to -20 °C.

## Optical part

Opal polycarbonate diffuser.

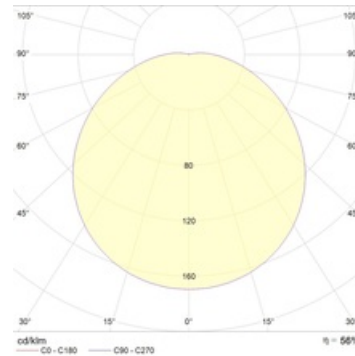

## Dimensional characteristics

A	Length	359 mm
C	Height	131 mm
	Weight	4.5 kg

## Technical features

1	Article no.	1430000150
2	Light source	CFL
3	Socle	G24q-3
4	Number of Lamps	2
5	Power compatibility	52 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	-
10	Rated voltage	220 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Silver
16	Fire protection class	-
17	Flickering	<25%
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK00
20	Energy efficiency class	-
21	Emergency power supply unit	Yes
22	Beam angle	-