

INSEL LB/R LED 80 D120 5000K /E/

INSEL Series recessed luminaires

Description

High IP rating, energy-efficient luminaire for recessed mounting (including under a petrol station canopy). Can be powered from 90–250 V, 50–60 Hz AC or 130–430 V DC mains. Replaces luminaires with metal halide lamp (MHL), mercury lamp, high pressure sodium lamp (HPS). Can be used in an emergency lighting installation with the DIALOG central emergency lighting system.

Installation



Luminaires are integrated into niches by means of fixing set (included into delivery set).

Design

Casing of die-cast aluminum. Solid metal welded frame, covered by white powder paint. Secondary optics of PMMA with different light distribution angles.

Optical part

Translucent tempered glass. LED type: SMD.

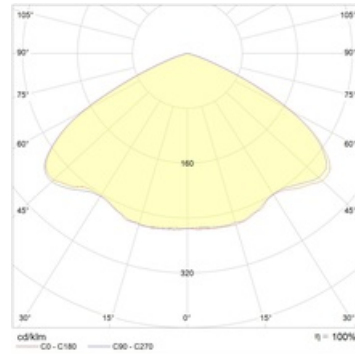

Dimensional characteristics

A	Length	480 mm
B	Width	390 mm
C	Height	130 mm
D	Length (mounting)	360 mm
E	Width (mounting)	360 mm
	Weight	11.8 kg

Technical features

1	Article no.	1997016180
2	Light source	LED
3	Luminous flux	8000 lm
4	Power compatibility	76 W
5	Energy efficiency	105 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	5000 K
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App1
15	Ambient temperature	-40 to +60 C
16	Housing color	White
17	Fire protection class	I,II,IIa,III
18	Flickering	<5%
19	Ingress protection (IP)	IP66
20	Mechanical shock protection	IK08/5 J
21	Energy efficiency class	A+
22	Inrush current	60 A
23	Inrush current impulse time	1000 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	Белый