

INSEL LB/S LED 80 D120 5000K /E/

INSEL Series surface-mounted luminaires

Description

INSEL LB/S LED series LED-based industrial luminaires designed for plant floors with 5 m to 12 m ceiling height, sports facilities, and petrol stations. Compact dimensions, high IP rating, high energy efficiency. Versions can be manufactured with light control function and a built-in light sensor.

Installation



Luminaires are installed from the ceiling surface indoors or under the shelter. Luminaires may be fixed at the wall or console by means of wall mounting bracket INSEL LB/S LED (order code – 2334000010) or pole mounting bracket INSEL LB/S LED (order code – 2334000020).

Design

Casing of pressure-cast aluminum, covered with white powder paint.

Optical part

Secondary optics of PMMA with different light distribution angles. Translucent tempered glass. LED type: SMD.

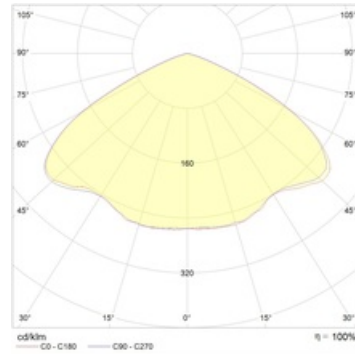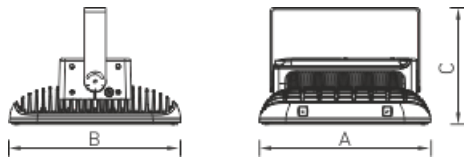

Dimensional characteristics

A	Length	335 mm
B	Width	335 mm
C	Height	190 mm
D	Length (mounting)	200 mm
E	Width (mounting)	200 mm
	Weight	10 kg

Technical features

1	Article no.	1997016350
2	Light source	LED
3	Luminous flux	8000 lm
4	Power compatibility	76 W
5	Energy efficiency	105 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	5000 K
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App1
15	Ambient temperature	-40 to +60 C
16	Housing color	White
17	Fire protection class	I,II,IIa,III
18	Flickering	<5%
19	Ingress protection (IP)	IP66
20	Mechanical shock protection	IK08/6,5 J
21	Energy efficiency class	A+
22	Inrush current	60 A
23	Inrush current impulse time	1000 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	Белый