

## Explosion-proof junction box LTJB-eP-1/1.1-[24x6]-[LT-BM-X2(1/1/1/0)]

### Explosion-proof plastic junction boxes

#### Description

LTJB-eP junction boxes for connection or branching of round-sheathed armored or unarmored cables with copper or aluminum cores in AC and DC circuits of electrical installations in oil/gas and petrochemical industry.

#### Installation

Flat surface mounting.

#### Design

The housing is made of fiberglass-reinforced polyester. The enclosure consists of a housing and a cover. There is DIN rail with terminals inside the housing. Cable glands, couplings, end plugs can be installed on the sides of enclosure. Mounting straps, fasteners are made of corrosion-resistant steel.

#### EX Mark

1 Ex e II T6 Gb / 0 Ex ia IIC T6 X Ga/ Ex tb IIIC Ta80°C Db – for junction box; 1 Ex e II Gb U / Ex tb IIIC Db U – for enclosure.


#### Characteristics

Explosion-proof protection according "increased safety "e", "intrinsic safety "i", "dust ignition protection "t". Zones: gas explosion protection – 0, 1, 2; dust explosion protection – 20, 21, 22. Maximum rated voltage: 690 V. Maximum rated current: 125 A.

#### Product picture:



#### Dimensions:

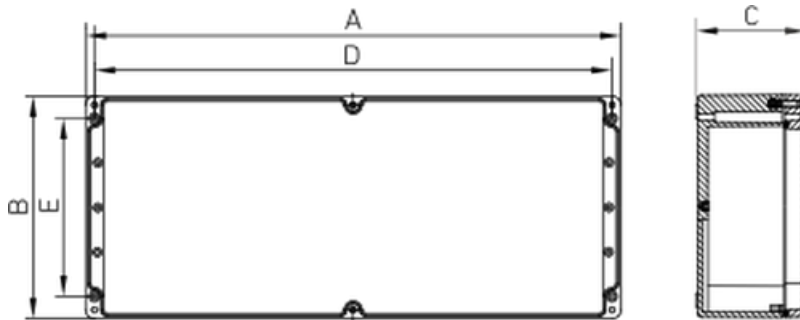

A	Length	140 mm
B	Width	105 mm
C	Height	57 mm
D	Length (mounting)	68 mm
E	Width (mounting)	45 mm
Weight		0.4 kg

## Technical features

1	Article no.	2327001360
2	Marking for gas	1 Ex e II T6 Gb
3	Dust marking	Ex tb IIIC T80 C Db
4	Mine gas coal dust marking	-
5	Electrical shock protection	I
6	Ambient temperature	-60 to +55 C
7	Climate application	CIm App1
8	Ingress protection (IP)	IP66
9	Mechanical shock protection	IK08/7 J
10	Electromagnetic compatibility (EMC)	No
11	Energy efficiency class	-
12	Housing color	Black
13	Warranty	18 months