

LEADER UMS 250S Grey /E/

Floodlights

Description

Floodlights for architectural lighting and sports venues lighting with a high IP rating. Discharge lamps are used as the light source.

Installation

Indoor or outdoor installation.

Design

Powder-painted die-cast aluminum housing and frame. The control gear is mounted on a metal plate inside the housing.


Optical part

Anodized aluminum reflector. Clear tempered protective glass.


Product picture:



Light distribution:

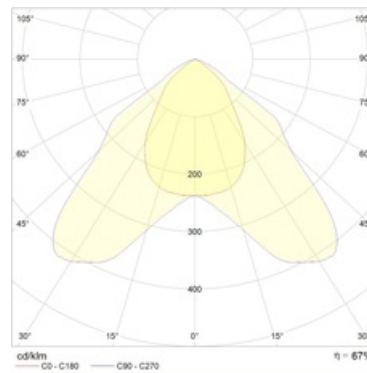

Dimensions:

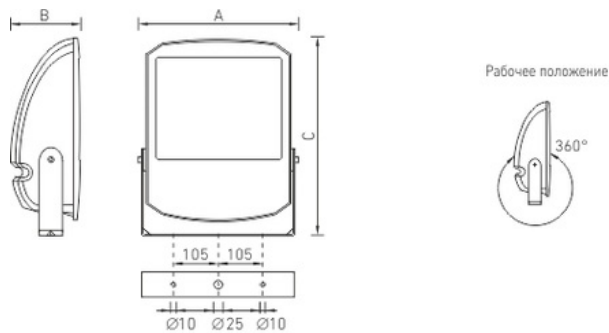

A	Length	545 mm
B	Width	445 mm
C	Height	200 mm
D	Length (mounting)	250 mm
	Weight	16.5 kg

Technical features

1	Article no.	1997030140
2	Light source	SL
3	Socle	E40
4	Number of Lamps	1
5	Power compatibility	250 W
6	Ballast	EmCG
7	Dimming	-
8	Power factor (cosFI)	> 0,85
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Grey
16	Fire protection class	I,II,IIa,III
17	Flickering	<55%
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK08/6,5 J
20	Energy efficiency class	A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	60 months