

LED STRIP Flexline 120/9.6/500 3000K/IP67

LED strip

Description


LED strip IP is designed for decorative illumination, general lighting and creation of different light effects. Strip is offered of various power values, monochrome and RGB. Applying thermo-conductive adhesive base from the company 3M, strip can safely be installed on almost any flat surface.

Installation

On a ceiling.

Design

LED strip supplied on 5 m reels.

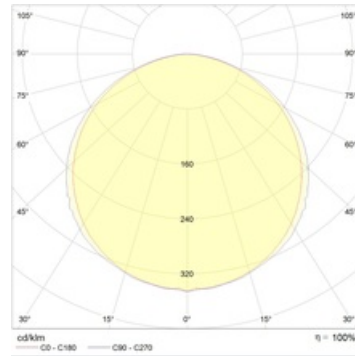

Dimensional characteristics

A	Length	5000 mm
B	Width	13 mm
C	Height	4 mm
	Weight	0.2 kg

Technical features

1	Article no.	2010000220
2	Light source	LED
3	Luminous flux	500 lm
4	Power compatibility	9.6 W
5	Energy efficiency	52 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	3000 K
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	24 V
12	Electrical shock protection	III
13	Electromagnetic compatibility (EMC)	No
14	Climate application	CIm App2
15	Ambient temperature	-25 to +40 C
16	Housing color	Transparent
17	Fire protection class	I,II,III
18	Flickering	0
19	Ingress protection (IP)	IP67
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	Белый