

## LED STRIP Flexline 60/14.4/750 4000K/IP67

LED strip



### Description


LED strip IP is designed for decorative illumination, general lighting and creation of different light effects. Strip is offered of various power values, monochrome and RGB. Applying thermo-conductive adhesive base from the company 3M, strip can safely be installed on almost any flat surface.

### Installation

On a ceiling.

### Design

LED strip supplied on 5 m reels.

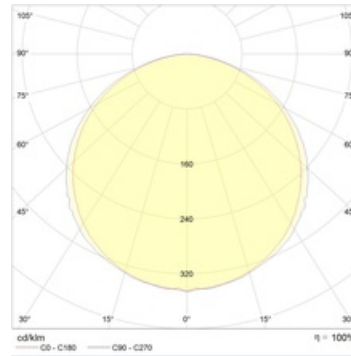

### Dimensional characteristics

A	Length	5000 mm
B	Width	12 mm
C	Height	4 mm
	Weight	0.2 kg

## Technical features

1	Article no.	2010000140
2	Light source	LED
3	Luminous flux	750 lm
4	Power compatibility	14.4 W
5	Energy efficiency	52 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	24 V
12	Electrical shock protection	III
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clm App2
15	Ambient temperature	-60 to +40 C
16	Housing color	Transparent
17	Fire protection class	I,II,III
18	Flickering	0
19	Ingress protection (IP)	IP67
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	D...B
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-