

## LEDA S 415 WH 275

Surface-mounted glass luminaire

### Description

Surface-mounted glass luminaire for diffused lighting. Hand-blown three-ply opal glass diffuser. The decorative chrome-plated ring lends the luminaire an elegant, extra attractive look.

### Installation



On a ceiling or wall.

### Design

Surface-mounted luminaire. The diffuser is attached to a metal plate using special latches. The control gear is installed on the plate.

### Optical part

Opal diffuser.

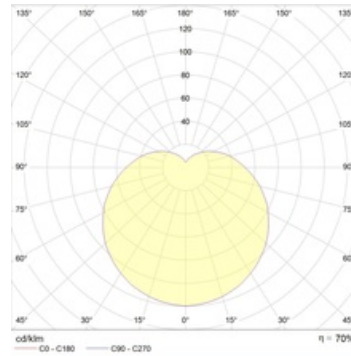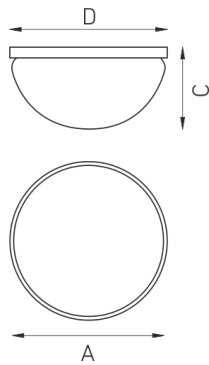

## Dimensional characteristics

A	Diameter	415 mm
C	Height	235 mm
D	Diameter (mounting)	370 mm
	Weight	4.2 kg

## Technical features

1	Article no.	1534000100
2	Light source	IL
3	Luminous flux	940 lm
4	Power compatibility	150 W
5	Energy efficiency	13 lm/W
6	Color rendering index (CRI)	-
7	Color temperature	-
8	Power factor (cosFI)	> 0,95
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	CIm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	E
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-