

LINER/S DR LED 1200 S 4000K /E/

Suspended light lines

Description

Suspended modular LED-based lighting system for offices, meeting rooms, corridors, lobbies, and lounges. Modern design, comfortable light, and energy efficiency – these are unbeatable arguments for choosing the Liner LED. Line width 10 cm.

Installation

Mounted on the ceiling surface using the included wire-rope suspensions (max. 2 m). LINER DR luminaires are designed to be connected in-line. For in-line connection, an end cap kit needs to be ordered that includes 2 end caps and the associated fasteners. Order codes for LINER/S DR LED end cap kits: 2471000090 (white), 2471000100 (metallic). LINER/S CC LED is an angled unit.

Design

White or metallic powder-painted aluminium profile housing.


Optical part

Opal PMMA diffuser. LED type: SMD.


Product picture:



Light distribution:

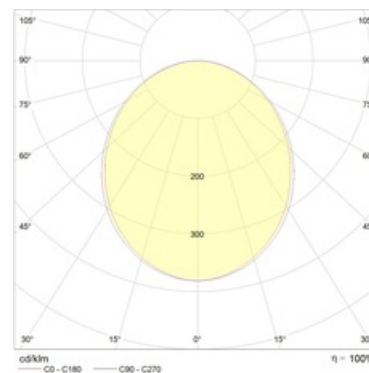

Dimensions:



A	Length	1140 mm
B	Width	105 mm
C	Height	94 mm
D	Length (mounting)	1310 mm
	Weight	4.4 kg

Technical features

1	Article no.	1997017330
2	Light source	LED
3	Luminous flux	2200 lm
4	Power compatibility	26 W
5	Energy efficiency	85 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,95
9	Alternating/direct current (AC/DC)	Yes
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	Silver
17	Fire protection class	-
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A
22	Emergency power supply unit	No
23	Beam angle	D120
24	Warranty	60 months
25	Autonomy in emergency mode	-
26	Light flux in emergency mode	-
27	Color of light	White