

LTX 236 HF ES1

LTX Luminaires with a prismatic diffuser

Description

Ceiling-mounted luminaire. The prismatic diffuser produces soft diffused light, distributing it evenly in the room. A T5 fluorescent lamp with a high luminous efficacy, good color rendering, and long service life is used as the light source.

Installation



Mounted on the ceiling surface or suspended on wire ropes (max. 2 m). Suspension kit order code: 2901000240 (2 suspension kits per luminaire). For surface-mounting on a ceiling, the X3 Mounting Kit (order code 2995000030) needs to be ordered.

Design


White powder-painted sheet steel housing. Polymeric end caps. Control gear is installed inside the housing.

Optical part


Prismatic diffuser made of extruded transparent polymeric material.

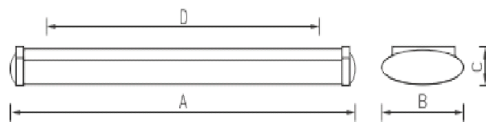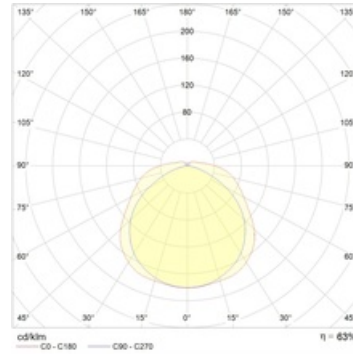


LTX LS:



LTX LC:



LTX LF:



Dimensional characteristics

A	Length	1290 mm
B	Width	210 mm
C	Height	75 mm
D	Length (mounting)	1050 mm
	Weight	2.9 kg

Technical features

1	Article no.	1055000070
2	Light source	FL
3	Socle	G13
4	Number of Lamps	2
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	Yes
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP40
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	Yes
22	Beam angle	-
23	Warranty	36 months