

LUX FHB/T HG70 W D24 HF

Adjustable luminaires with concentrating optics



Description

Track-mounted accent luminaire in an aluminum housing. Rotary optical part for flexibility in light direction (85 degrees from the horizontal and 350 degrees about the axis). Beam angles from narrow (10 degrees) to medium (45 degrees) for creating different light scenes.

Installation


Mounted on a three-phase euro-DIN track using an adapter.

Design

Powder coated die-cast aluminum housing with plastic inserts. The control gear is mounted inside the housing. The luminaire housing can be tilted up to 85° from the horizontal.

Optical part

Anodized aluminum reflector with an anti-glare tempered silicate protective glass.

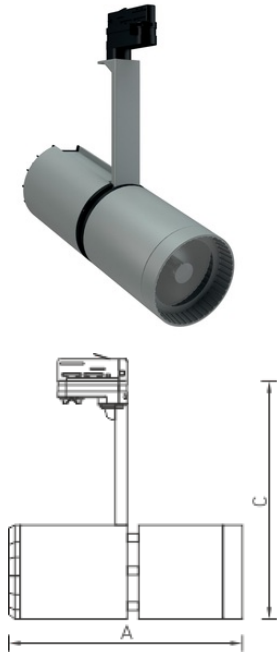

Dimensional characteristics

A	Length	280 mm
B	Width	116 mm
C	Height	310 mm
	Weight	1.1 kg

Technical features

1	Article no.	1277000120
2	Light source	MHL
3	Socle	G12
4	Number of Lamps	1
5	Power compatibility	70 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	-
10	Rated voltage	220 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<25%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	-
20	Energy efficiency class	-
21	Emergency power supply unit	No
22	Beam angle	-