

# LYRA 6521-4 LED

LYRA series luminaires

## Description

Lightweight and reliable light sign with a decorative aluminum frame. Universal solution with 30 m recognition distance. The IP65, centrally operated versions work at low down to  $-30\text{ }^{\circ}\text{C}$  (parking lots).

## Installation




Mounted on a wall or ceiling.

## Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

## Optical part

Polycarbonate diffuser. Pictograms are supplied separately. Recognition distance 30 m. LED lamps are included.

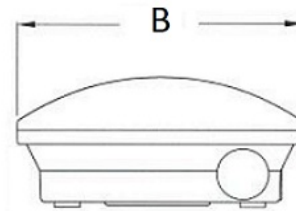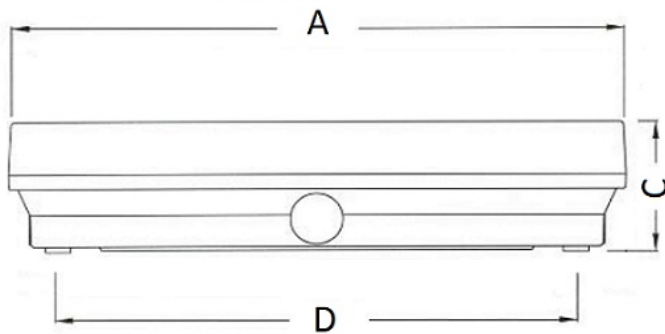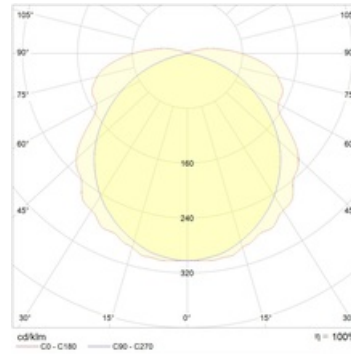

## Dimensional characteristics

A	Length	342 mm
B	Width	158 mm
C	Height	74 mm
D	Length (mounting)	250 mm
	Weight	1.1 kg

## Technical features

1	Article no.	4502000010
2	Light source	LED
3	Power compatibility	4 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	A
7	Color rendering index (CRI)	>75
8	Flickering	<5%
9	Luminous flux	200 lm
10	Battery Ni-Cd	RB 6,0 V 0,8 A*h Ni-Cd
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App4
15	Housing color	White
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP65
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	Yes
21	Autonomy in emergency mode	1
22	Emerg. work type	maintained
23	Average brightness	300
24	Identification distance	31
25	Warranty	60 months
26	Light flux in emergency mode	275 lm