

LZ 258 HFR ES1 new

LZ series luminaires

Description

Industrial luminaire with a high IP rating and high luminous efficacy. Designed for harsh operating conditions. Versions can be manufactured with Class II electrical protection, an emergency power supply unit, lighting control function, and vandal-proof construction.

Installation



Mounted on the ceiling/wall surface or suspended indoors or under a canopy. Mounting plates and brackets are included.

Design

Grey polycarbonate housing. Removable metal panel with control gear.

Optical part

Polycarbonate diffuser secured to the housing with metal latches.

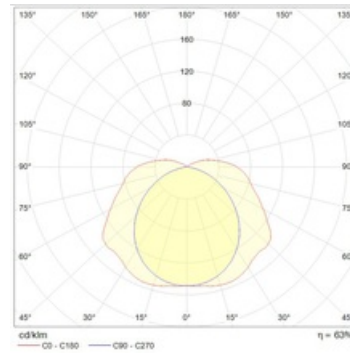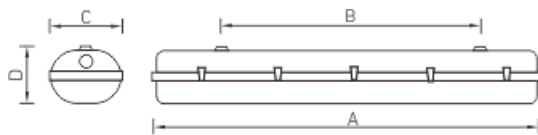

Technical features

| | | |
|----|-------------------------------------|--------------|
| 1 | Article no. | 1073000750 |
| 2 | Light source | FL |
| 3 | Socle | G13 |
| 4 | Number of Lamps | 2 |
| 5 | Power compatibility | 116 W |
| 6 | Ballast | ECG reg |
| 7 | Dimming | - |
| 8 | Power factor (cosFI) | > 0,96 |
| 9 | Alternating/direct current (AC/DC) | - |
| 10 | Rated voltage | 220 V |
| 11 | Electrical shock protection | I |
| 12 | Electromagnetic compatibility (EMC) | Yes |
| 13 | Climate application | Clm App2 |
| 14 | Ambient temperature | -20 to +40 C |
| 15 | Housing color | Grey |
| 16 | Fire protection class | - |
| 17 | Flickering | <25% |
| 18 | Ingress protection (IP) | IP65 |
| 19 | Mechanical shock protection | IK08/6,5 J |
| 20 | Energy efficiency class | A |
| 21 | Emergency power supply unit | No |
| 22 | Beam angle | - |