

LZ.OPL ECO LED 1200 TH 5000K /E/

IP65 rated luminaires

Description

Slim-bodied (TH) industrial luminaire for illuminating small technical premises, car repair shops, and parking lots. Quick and easy surface mounting using mounting plates.

Installation

Mounted on ceiling/wall surface or suspended indoors or under canopy. Mounting plates and brackets are included in supply.

Design

Grey polycarbonate housing.


Optical part

Opal (OPL) polycarbonate diffuser attached to the housing with metal latches. LED type: SMD.


Product picture:



Light distribution:

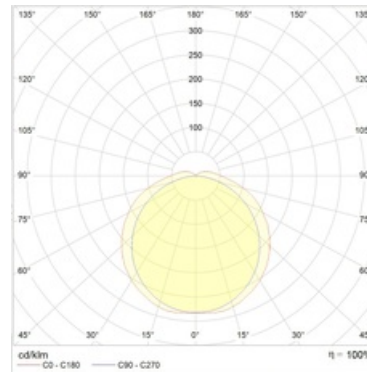

Dimensions:

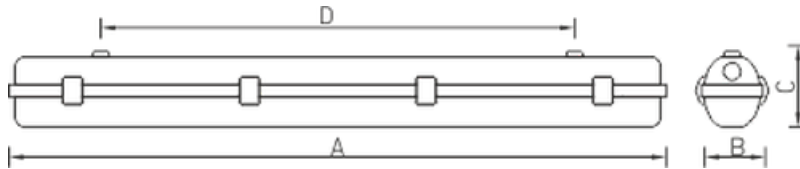

A	Length	1270 mm
B	Width	110 mm
C	Height	103 mm
D	Length (mounting)	800 mm
	Weight	2.4 kg

Technical features

1	Article no.	1997021840
2	Light source	LED
3	Luminous flux	3200 lm
4	Power compatibility	30 W
5	Energy efficiency	107 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	5000 K
8	Power factor (cosFI)	> 0,95
9	Alternating/direct current (AC/DC)	Yes
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App2
15	Ambient temperature	-40 to +40 C
16	Housing color	Grey
17	Fire protection class	II
18	Flickering	<5%
19	Ingress protection (IP)	IP65
20	Mechanical shock protection	IK08/5 J
21	Energy efficiency class	A+
22	Emergency power supply unit	No
23	Beam angle	D120
24	Warranty	60 months
25	Autonomy in emergency mode	-
26	Light flux in emergency mode	-
27	Color of light	White