

MIZAR 4023-4 LED S

MIZAR series light signs

Description

A versatile solution in the light sign segment, the MIZAR luminaire can be mounted directly on the ceiling or wall surface or on flexible or rigid suspensions of a different length (supplied separately).

Installation



Mounted on the wall surface (side or front mounting), ceiling surface (directly or using suspensions), or recessed in the ceiling using the ST 36 frame (order code – 2501002150). Accessories are ordered separately.

Design

Polycarbonate housing. An operational status LED is installed on the housing panel. Emergency lighting testing and control are performed from a TELEMANDO device. Rechargeable batteries are included.

Optical part

Double-sided PMMA diffuser. Pictograms are delivered separately. Recognition distance: 30 m (S), 25 m (SP), 40 m (SI), 10 m (SPS).

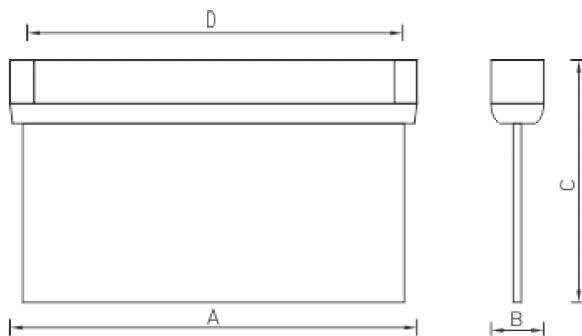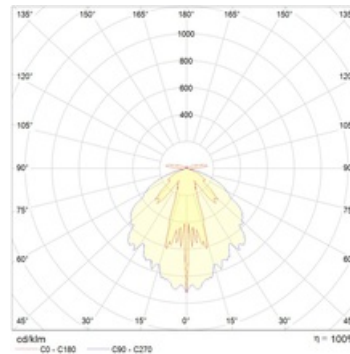

Dimensional characteristics

A	Length	366 mm
B	Width	48 mm
C	Height	233 mm
D	Length (mounting)	260 mm
	Weight	1.6 kg

Technical features

1	Article no.	4502001110
2	Light source	LED
3	Power compatibility	4 W
4	Power factor (cosFI)	-
5	Emergency power supply unit	No
6	Energy efficiency class	A
7	Color rendering index (CRI)	>70
8	Flickering	<5%
9	Luminous flux	200 lm
10	Battery Ni-Cd	RB 6,0 V 0,8 A*h Ni-Cd
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Ambient temperature	0 to +40 C
14	Climate application	CIm App4
15	Housing color	White
16	Fire protection class	-
17	Electromagnetic compatibility (EMC)	Yes
18	Ingress protection (IP)	IP40
19	Mechanical shock protection	IK02/0,2 J
20	Alternating/direct current (AC/DC)	No
21	Autonomy in emergency mode	3
22	Emerg. work type	maintained
23	Average brightness	150
24	Identification distance	33
25	Warranty	60 months
26	Light flux in emergency mode	-