

## MOTION OLED 3000K

Suspended OLED-based luminaire

### Description

Suspended luminaire producing straight diffused light. Organic Light Emitting Diode (OLED) is used as the light source. The lighting fixture case is made out of the white artificial stone.

### Installation



Suspended to a ceiling.

### Design

Organic LEDs (OLEDs) are used as the light source. The driver is located inside the ceiling cup.

### Optical part

OLED.

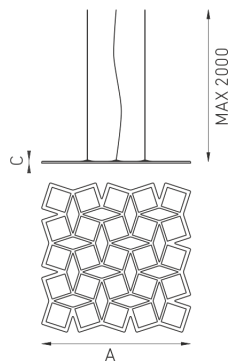

## Dimensional characteristics

A	Length	673 mm
B	Width	673 mm
C	Height	15 mm
D	Length (mounting)	261 mm
E	Width (mounting)	261 mm
	Weight	4 kg

## Technical features

1	Article no.	1678000030
2	Light source	OLED
3	Luminous flux	1875 lm
4	Power compatibility	37.5 W
5	Energy efficiency	50 lm/W
6	Color rendering index (CRI)	>90
7	Color temperature	3000 K
8	Power factor (cosFI)	> 0,90
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	-
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	D...B
22	Inrush current	20 A
23	Inrush current impulse time	400 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-
29	Color of light	-