

NBL 52 F126 black SET

Wall-mounted luminaires

Description

Luminaire for outdoor applications with a high degree of protection. Versions are available with different light sources, from most basic incandescent lamps to high-pressure discharge lamps. Designed for wall mounting.

Installation

Mounted on the wall surface.

Design

Housing is made of die-cast aluminum. The control gear is mounted on a metal plate inside the housing.


Optical part

Opal microprismatic polycarbonate diffuser.

Product picture:



Light distribution:

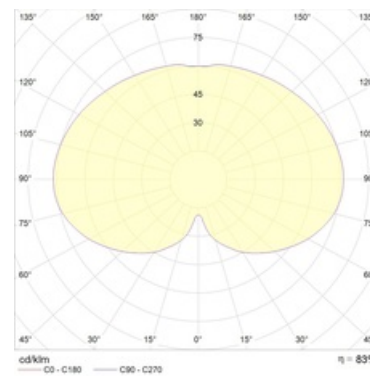

A	Length	547 mm
B	Width	492 mm
C	Height	577 mm
D	Diameter (mounting)	90 mm
	Weight	7.5 kg

Technical features

1	Article no.	1403000320
2	Light source	CFL
3	Socle	G24d-3
4	Number of Lamps	1
5	Power compatibility	26 W
6	Ballast	EmCG
7	Dimming	-
8	Power factor (cosFI)	> 0,85
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	CIm App1
14	Ambient temperature	-40 to +40 C
15	Housing color	Black
16	Fire protection class	-
17	Flickering	<40%
18	Ingress protection (IP)	IP55
19	Mechanical shock protection	IK08/6,5 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-