

OKKO IP54/IP20 26 WH 4000K (with driver) /E/

Recessed LED-based luminaire



Description

Recessed LED downlight. The luminaire body is made of aluminum, painted matt paint. Deep mirror decorative frame of mirrored aluminum creates a large protective angle and effect of the "turn off" the light source – "dark light". Optical part closed faceted glass. Standard color: WH – white.

Installation



Installed in ceilings.

Design

The body is made of aluminium and painted matte white. Deep decorative frame made from aluminium with mirror surface. Optical part closed by the matt glass.

Optical part

Diffuser is frosted glass

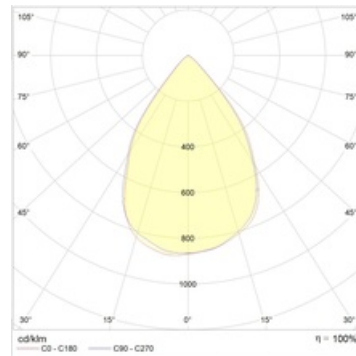

Dimensional characteristics

A	Diameter	175 mm
C	Height	147 mm
D	Diameter (mounting)	143 mm
	Weight	1.2 kg

Technical features

1	Article no.	1997026500
2	Light source	LED
3	Luminous flux	3200 lm
4	Power compatibility	31 W
5	Energy efficiency	103 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,90
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clm App4
15	Ambient temperature	0 to +40 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP54/IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	7 A
23	Inrush current impulse time	50 µs
24	Emergency power supply unit	No
25	Beam angle	D70
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-