

# OKKO IP54/IP20 26 WH 4000K (with driver) EM3 /E/

Recessed LED-based luminaire



## Description

Recessed LED downlight. The luminaire body is made of aluminum, painted matt paint. Deep mirror decorative frame of mirrored aluminum creates a large protective angle and effect of the "turn off" the light source – "dark light". Optical part closed faceted glass. Standard color: WH – white.

## Installation



Installed in ceilings.

## Design

The body is made of aluminium and painted matte white. Deep decorative frame made from aluminium with mirror surface. Optical part closed by the matt glass.

## Optical part

Diffuser is frosted glass

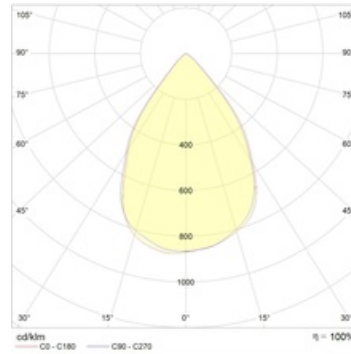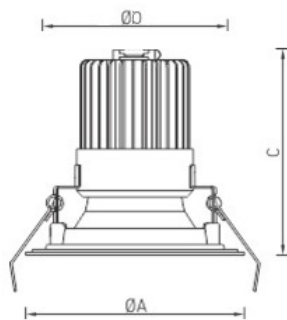

### Dimensional characteristics

A	Diameter	175 mm
C	Height	147 mm
D	Length (mounting)	143 mm
	Weight	1.2 kg

## Technical features

1	Article no.	1997026510
2	Light source	LED
3	Luminous flux	3200 lm
4	Power compatibility	31 W
5	Energy efficiency	103 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,90
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	II
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clm App4
15	Ambient temperature	0 to +40 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP54/IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	7 A
23	Inrush current impulse time	50 µs
24	Emergency power supply unit	No
25	Beam angle	D70
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-