

ORBIS S 415 WH 440

Ceiling surface mounted lamp luminaire

Description

Ceiling surface mounted luminaire creates diffused illumination. Diffuser made of hand blown three-layered opal glass. Ceiling cup and mounting plate made of metal painted mat white.

Installation



Mounted on a wall or ceiling.

Design

Hand-blown three-ply opal glass diffuser. Metal parts painted white.

Optical part

Opal diffuser

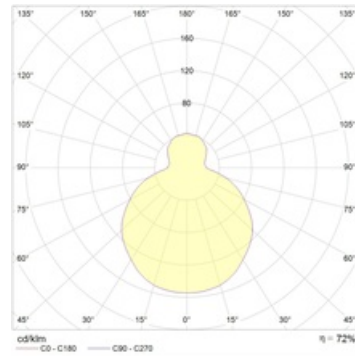

Dimensional characteristics

A	Diameter	415 mm
C	Height	100 mm
D	Diameter (mounting)	30 mm
	Weight	3.4 kg

Technical features

1	Article no.	1533000110
2	Light source	IL
3	Luminous flux	420 lm
4	Power compatibility	160 W
5	Energy efficiency	8 lm/W
6	Color rendering index (CRI)	-
7	Color temperature	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	No
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	E
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-