

# OTM 236 /595/ HF

Indirect luminaires



## Description

Indirect luminaire. Can be installed in Armstrong type suspended ceilings or plasterboard ceilings. Produces soft diffused light due to indirect lighting.

## Installation



Installed recessed in Armstrong type suspended ceilings.

## Design

Matte white powder-painted weld sheet steel housing.

## Optical part

Two perforated metal diffusers with lighting film.

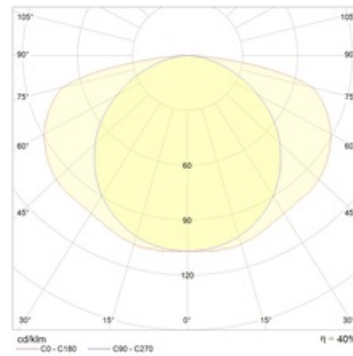

## Dimensional characteristics

A	Length	595 mm
B	Width	595 mm
C	Height	120 mm
D	Length (mounting)	575 mm
E	Width (mounting)	575 mm
	Weight	4.7 kg

## Technical features

1	Article no.	1107000020
2	Light source	CFL
3	Socle	2G11
4	Number of Lamps	2
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months