

OTR/R 255 /595/ HF

Indirect luminaires

Description

Indirect luminaire for installation in Armstrong type suspended ceilings. Produces soft diffused light due to indirect lighting.

Installation



Installed recessed in Armstrong type suspended ceilings.

Design

Matte white powder-painted sheet steel housing. Control gear is installed inside the housing.

Optical part

Perforated metal diffuser with lighting film.

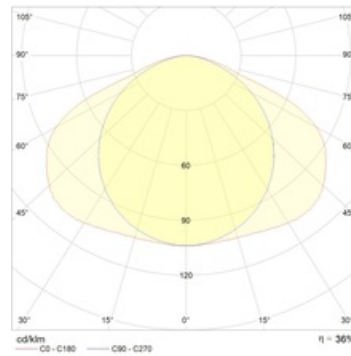

Dimensional characteristics

A	Length	595 mm
B	Width	595 mm
C	Height	110 mm
D	Length (mounting)	575 mm
E	Width (mounting)	575 mm
	Weight	4 kg

Technical features

1	Article no.	1111000120
2	Light source	CFL
3	Socle	2G11
4	Number of Lamps	2
5	Power compatibility	110 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months