

OTS 236 HF

Indirect luminaires

Description

Indirect luminaire. Can be mounted on ceilings or walls. T5 and T8 lamps are used as the light sources.

Installation



Mounted indoors on the ceiling or wall surface. Requires ordering X3 Mounting Kit (order code 2995000030).

Design

White powder-painted sheet steel housing. Polymeric side caps.

Optical part

Perforated metal diffuser with lighting film.

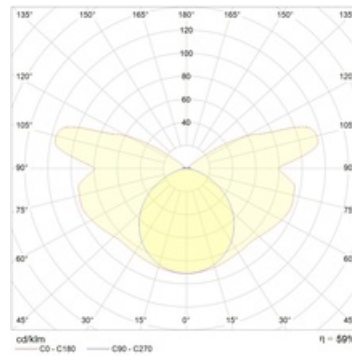

Dimensional characteristics

A	Length	1260 mm
B	Width	280 mm
C	Height	115 mm
D	Length (mounting)	1078 mm
	Weight	4.3 kg

Technical features

1	Article no.	1113000050
2	Light source	FL
3	Socle	G13
4	Number of Lamps	2
5	Power compatibility	72 W
6	Ballast	ECG
7	Dimming	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	A
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months