

PLC 002

Recessed plaster luminaire

Description

Recessed down light. Gypsum housing, metal parts painted white, opal diffuser made of PMMA. Wall installation in niche of gypsum boards by means of mounting clips. Gypsum surface can be painted after treatment with primer.

Installation



Installed in niches of plasterboard ceilings using mounting clips.

Design

Plaster housing, white-painted metal structural bars, opal PMMA diffuser. The diffuser is inserted into the grooves in the housing .

Optical part

PMMA diffuser.

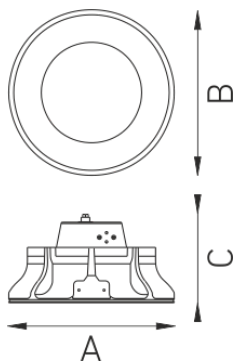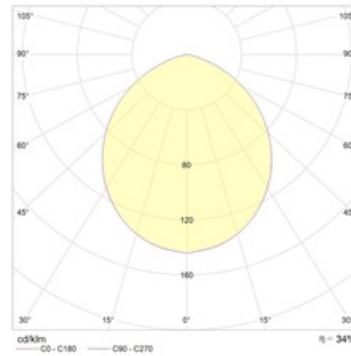

Dimensional characteristics

A	Diameter	330 mm
C	Height	180 mm
D	Length (mounting)	333 mm
	Weight	2.2 kg

Technical features

1	Article no.	1538000020
2	Light source	CFL
3	Socle	E27
4	Number of Lamps	2
5	Power compatibility	36 W
6	Ballast	without EG
7	Dimming	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	III
17	Flickering	<15%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	B...A+
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months