

PLW 003

Wall-mounted plaster luminaire

Description



Recessed indirect luminaire. Gypsum housing, metal parts painted white. Wall installation in niche of gypsum boards by means of mounting clips. Gypsum surface can be painted after treatment with primer.

Installation

Installed in niches of plasterboard ceilings using mounting clips.

Design

Plaster housing, white-painted metal structural bars.

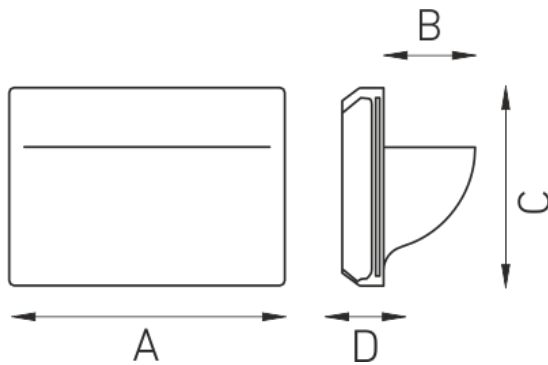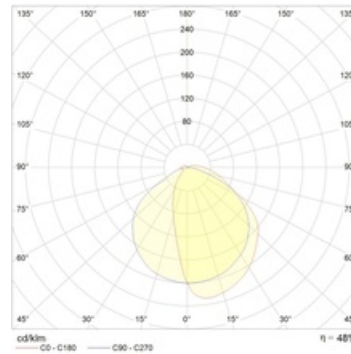

Dimensional characteristics

A	Length	280 mm
B	Width	42 mm
C	Height	200 mm
D	Length (mounting)	205 mm
E	Width (mounting)	285 mm
	Weight	2.2 kg

Technical features

1	Article no.	1537000030
2	Light source	IL
3	Socle	E14
4	Number of Lamps	1
5	Power compatibility	40 W
6	Ballast	without EG
7	Dimming	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	I
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App4
14	Ambient temperature	+5 to +35 C
15	Housing color	White
16	Fire protection class	III
17	Flickering	<20%
18	Ingress protection (IP)	IP20
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	E
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months