

PROFILE 30L (profile + diffuser 2500mm)

Suspended/surface-mounted profile system

Description

Suspension system based on the profile PROFILE L, creates a diffuse lighting. The body is made of extruded anodized aluminum, diffuser is extruded polycarbonate plastic. End caps are made of aluminum coated with paint "metallic" color. The power supply installed in the ceiling cup or in the ceiling void. Available ready-made models and individual components.

Installation


Suspended to a ceiling.

Design

Anodized extruded aluminum profile housing, extruded polycarbonate profile diffuser. Anodized aluminum end caps and galvanized steel fasteners are supplied separately. The PROFILE L is designed for driver installation inside a ceiling cup or behind a plasterboard ceiling.

Optical part

Extruded polycarbonate profile diffuser.

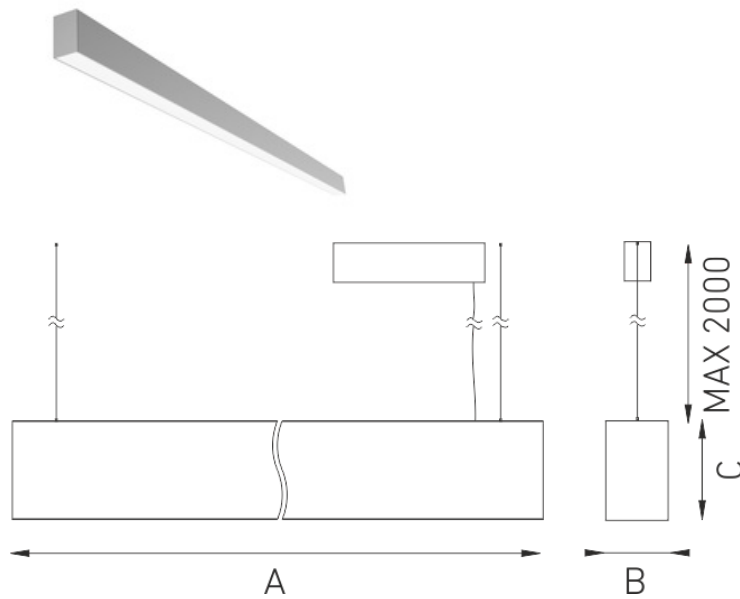

Dimensional characteristics

A	Length	2500 mm
B	Width	38 mm
C	Height	60 mm
	Weight	3 kg

Technical features

1	Article no.	2398000070
2	Light source	-
3	Luminous flux	0 lm
4	Power compatibility	0 W
5	Energy efficiency	0 lm/W
6	Color rendering index (CRI)	-
7	Color temperature	-
8	Power factor (cosFI)	> 0,96
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	-
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	CIm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	Metallic
17	Fire protection class	III
18	Flickering	-
19	Ingress protection (IP)	-
20	Mechanical shock protection	-
21	Energy efficiency class	-
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	-
26	Warranty	36 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-