

RG 100

IP54 rated luminaire

Description

Luminaire with a high degree of protection for the optical part. Suitable for architectural and local facade lighting. Uses compact fluorescent lamps.

Installation



Installed recessed in Armstrong type suspended ceilings or plasterboard ceilings.

Design

White powder-painted metal housing. An E27 lamp socket is installed inside the housing.

Optical part

Matte glass bowl. Secured in the housing with hidden springs.

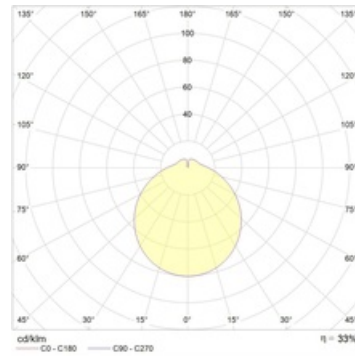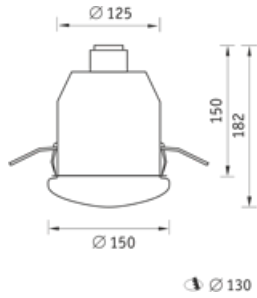

Dimensional characteristics

A	Diameter	150 mm
C	Height	182 mm
D	Diameter (mounting)	130 mm
	Weight	0.7 kg

Technical features

1	Article no.	1035000010
2	Light source	IL
3	Socle	E27
4	Number of Lamps	1
5	Power compatibility	100 W
6	Ballast	without EG
7	Dimming	-
8	Power factor (cosFI)	= 1,00
9	Alternating/direct current (AC/DC)	No
10	Rated voltage	230 V
11	Electrical shock protection	II
12	Electromagnetic compatibility (EMC)	Yes
13	Climate application	Clm App2
14	Ambient temperature	-20 to +40 C
15	Housing color	White
16	Fire protection class	-
17	Flickering	<5%
18	Ingress protection (IP)	IP54
19	Mechanical shock protection	IK02/0,2 J
20	Energy efficiency class	E
21	Emergency power supply unit	No
22	Beam angle	-
23	Warranty	36 months