

SINOPE W 350 WH LED 3000K

Wall-mounted glass luminaire



Description

Wall-mounted luminaire creates diffused illumination. Diffuser made of hand blown three-layered opal glass. Mounting plate made of metal painted matte white.

Installation



On a wall.

Design

Hand-blown three-ply opal glass diffuser. The diffuser is attached to a metal plate using special latches. Control gear is installed on the plate.

Optical part

Opal diffuser.

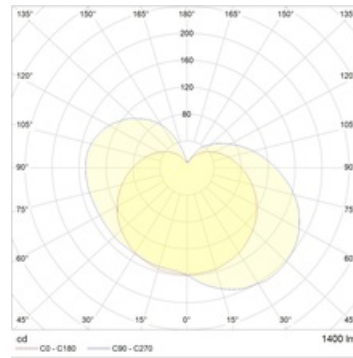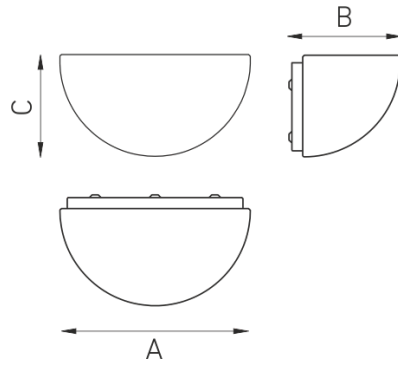

Dimensional characteristics

| | | |
|---|--------|--------|
| A | Length | 350 mm |
| B | Width | 200 mm |
| C | Height | 185 mm |
| | Weight | 3.8 kg |

Technical features

| | | |
|----|-------------------------------------|-------------|
| 1 | Article no. | 1521000050 |
| 2 | Light source | LED |
| 3 | Socle | LED |
| 4 | Number of Lamps | 1 |
| 5 | Power compatibility | 27 W |
| 6 | Ballast | Driver |
| 7 | Dimming | - |
| 8 | Power factor (cosFI) | = 1,00 |
| 9 | Alternating/direct current (AC/DC) | No |
| 10 | Rated voltage | 230 V |
| 11 | Electrical shock protection | I |
| 12 | Electromagnetic compatibility (EMC) | Yes |
| 13 | Climate application | Clm App4 |
| 14 | Ambient temperature | +5 to +35 C |
| 15 | Housing color | White |
| 16 | Fire protection class | III |
| 17 | Flickering | <5% |
| 18 | Ingress protection (IP) | IP40 |
| 19 | Mechanical shock protection | IK02/0,2 J |
| 20 | Energy efficiency class | D...B |
| 21 | Emergency power supply unit | No |
| 22 | Beam angle | D120 |
| 23 | Warranty | 60 months |