

SLICK.PRS ECO LED 60 4000K /E/

SLICK ECO LED Series luminaires



Description

SLICK.PRS ECO LED is the best solution for illuminating workshops, technical premises, underroof parking lots, and small warehouses. Can replace with fluorescent lamps luminaires.

Installation


Luminaires are fixed directly at ceiling or wall surface by means of mounting plates. Installation of luminaire at rope suspension is possible. Manufacture of luminaire with through wiring is available upon request.

Design

Casing is made of pressure-cast aluminum alloy, covered with grey powder paint.

Optical part

Translucent micro prism diffuser (PRS) or opal (OPL) diffuser of polycarbonate. LED type: SMD.

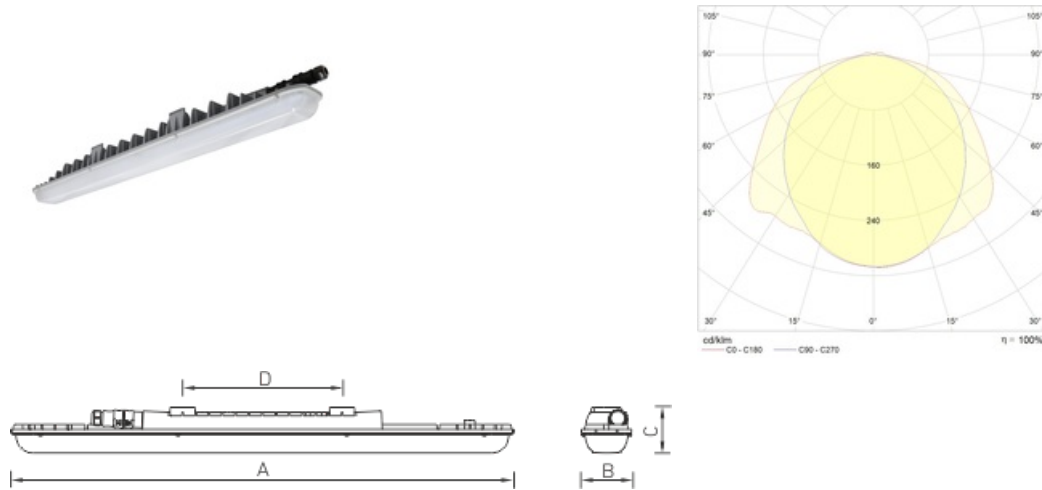

Dimensional characteristics

A	Length	953 mm
B	Width	96 mm
C	Height	105 mm
D	Length (mounting)	302 mm
	Weight	2.5 kg

Technical features

1	Article no.	1997020730
2	Light source	LED
3	Luminous flux	7000 lm
4	Power compatibility	59 W
5	Energy efficiency	119 lm/W
6	Color rendering index (CRI)	>70
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,99
9	Alternating/direct current (AC/DC)	Yes
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App2
15	Ambient temperature	-25 to +40 C
16	Housing color	Grey
17	Fire protection class	II
18	Flickering	<1%
19	Ingress protection (IP)	IP65
20	Mechanical shock protection	IK08/5 J
21	Energy efficiency class	A+
22	Inrush current	45 A
23	Inrush current impulse time	100 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-