


SOL S 600 WH LED 4000K (low lumen)

Ceiling luminaire

Description

Ceiling LED luminaire is creating direct diffuse lighting. The body of luminaire is made of bent aluminum profile. The diffuser is made of matt satin PMMA. Cluster located across the entire area of the luminaire creates exemplary illumination and high efficiency of the optical system. The strict classical design will fit in almost any office space.

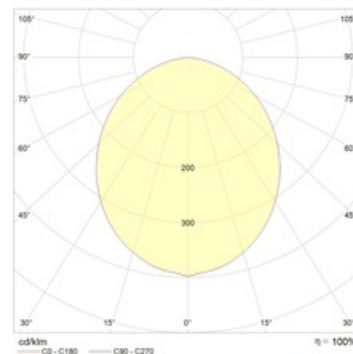

Dimensional characteristics

A	Diameter	600 mm
C	Height	90 mm
D	Length (mounting)	450 mm
E	Width (mounting)	390 mm
	Weight	7.8 kg

Technical features

1	Article no.	1470000350
2	Light source	LED
3	Luminous flux	4100 lm
4	Power compatibility	34 W
5	Energy efficiency	121 lm/W
6	Color rendering index (CRI)	>80
7	Color temperature	4000 K
8	Power factor (cosFI)	> 0,97
9	Alternating/direct current (AC/DC)	No
10	Dimming	-
11	Rated voltage	230 V
12	Electrical shock protection	I
13	Electromagnetic compatibility (EMC)	Yes
14	Climate application	Clm App4
15	Ambient temperature	+5 to +35 C
16	Housing color	White
17	Fire protection class	I,II,III
18	Flickering	<5%
19	Ingress protection (IP)	IP20
20	Mechanical shock protection	IK02/0,2 J
21	Energy efficiency class	A+
22	Inrush current	-
23	Inrush current impulse time	0 µs
24	Emergency power supply unit	No
25	Beam angle	D120
26	Warranty	60 months
27	Autonomy in emergency mode	-
28	Light flux in emergency mode	-